



SCPD 56/26 DIN is a dual flow pump with two separate flows of different sizes.

SCPD 56/26 DIN provides 56.0 and 26.0 cm³/rev. and supports a maximum working pressure of 400 bar. It can effectively be directly mounted on gear boxes equipped with engageable and disengageable power take-offs. It is speed optimised and therefore supplied for either left (L) or right (R) rotation direction.

Other advantages:

- High self-priming speed
- Constant low noise level
- Long life due to high demands on material selection, such as bearings, seals, etc.
- O-rings on all contact surfaces as well as double shaft seals

Versions, main data

Example

SC	PD	-	56/26	L	-	V	-	DL4	-	L35	-	S0	S	-	2	00
Line	1		2	3		4		5		6		7	8		9	10

Line	SC	Sunfab Compact, bent-axis design
------	----	----------------------------------

1. Type	PD	Dual flow pump
---------	----	----------------

2. Displacement	56/26
-----------------	-------

3. Direction of rotation	L	Left
	R	Right

4. Shaft seal	V	FPM
---------------	---	-----

5. Mounting flange	DL4	DIN 4-h (ISO 76530)
--------------------	-----	---------------------

6. Shaft	L35	DIN 5462/ISO14
----------	-----	----------------

7. Connection cover	S0	Sunfab standard
---------------------	----	-----------------

8. Connections	S	Sunfab standard
----------------	---	-----------------

9. Additional	2	Optimised
---------------	---	-----------

10. Accessories	00	No accessories available
-----------------	----	--------------------------


X = Standard, preferred

(X) = Available, option

O = Contact Sunfab

SCPD 56/26 DIN

Theoretical oil flow A+B at pump speed	rpm	l/min		
	600	34 + 16 = 50		
	1000	56 + 26 = 82		
	1200	67 + 31 = 98		
	1500	84 + 39 = 123		
	1800	101 + 47 = 148		
Displacement A+B	cm ³ /rev	56.0 + 26.1		
Max pump speed	rpm	1850		
Max working pressure	Bar	400		
Weight	kg	18.0		
Tare-weight torque without valve	Nm	21.0		
Theoretical power at pressure and pump speed	rpm	200 Bar	300 Bar	400 Bar
	600	11.2 + 5.2 = 16.4 kW	16.8 + 7.8 = 24.6 kW	22.4 + 10.4 = 32.8 kW
	1200	22.4 + 10.4 = 32.8 kW	33.6 + 15.6 = 49.2 kW	44.8 + 20.8 = 65.6 kW
	1800	33.6 + 15.6 = 49.2 kW	50.4 + 23.4 = 73.8 kW	67.2 + 31.2 = 98.4 kW
Theoretical torque on pump shaft at different pressures		200 Bar	300 Bar	400 Bar
		178 + 83 = 261 Nm	267 + 124 = 391 Nm	356 + 165 = 521 Nm
	Direction of rotation	Left (L) or Right (R)		

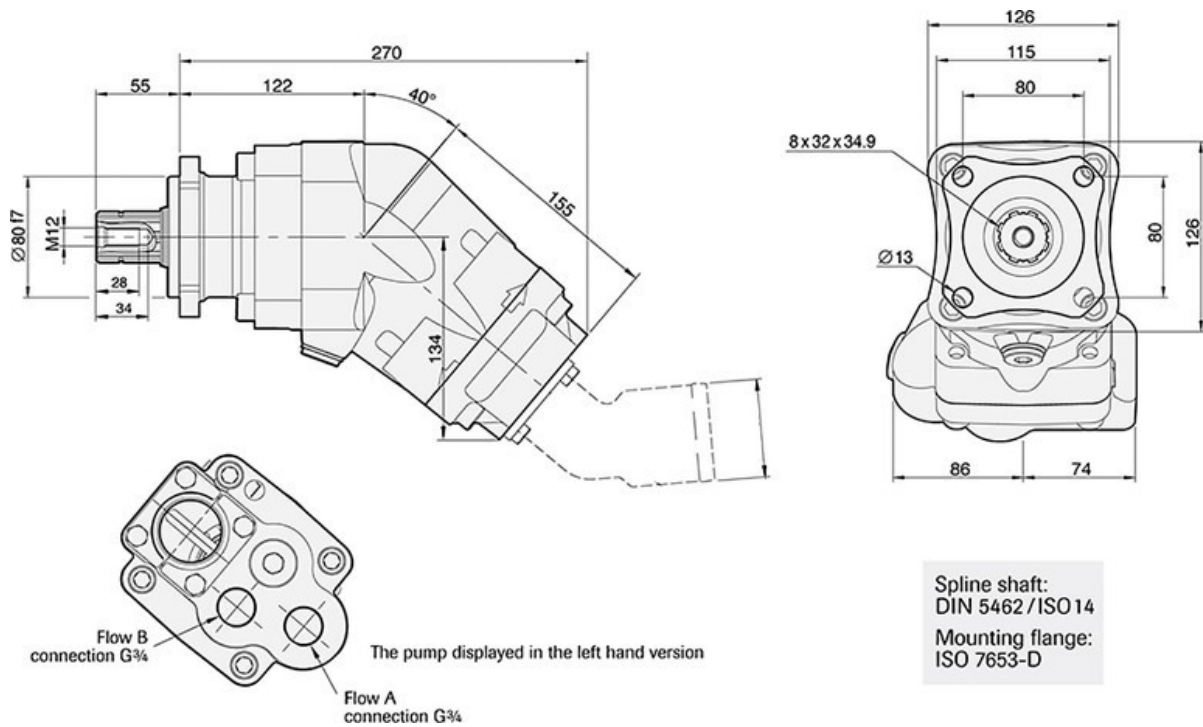

Spline shaft:
DIN 5462 / ISO 14
Mounting flange:
ISO 7653-D



WARNING!

When the pump is running:

1. Do not touch the pressure hose
2. Watch out for rotating parts
3. The pump and hoses may be hot

Sunfab reserves the right to make changes in design and dimensions without notice. Printing and typesetting errors reserved.

© Copyright 2022 Sunfab Hydraulics AB. All Rights Reserved.